


SuperSMA Jack (Female) Thread-In D550-P36-Y02



This model D550-P36-Y02 is a Connector utilizes the basic PTFE dielectric interface and features low VSWR mode free through 27 GHz and less than -100 dB RF leakage. The thick outer conductor wall provides great durability to assure reliability in repeat mating, enhancing component performance.

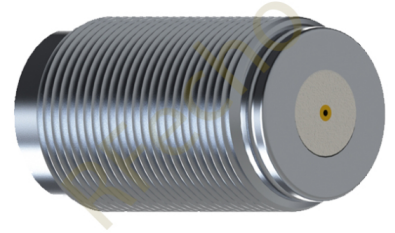

Features

low VSWR
free through 27 GHz and less than -100 dB RF leakage.

Available Accessories

50 ohm Seal


Applications

- Telecom Communication
- Sub-assemblies
- Radio equipment and instruments
- Wireless Communication
- Test Labs
- Instrumentations

Electrical Specifications

Frequency	(18-27) GHz
Mounting	Thread-in
Hermetic Seal Available	NO
Accepts Pin Diameter	.036
Gender	Female
Connector Length	.425 L
Rear Thd	.250-36

PRODUCT DIMENSIONS

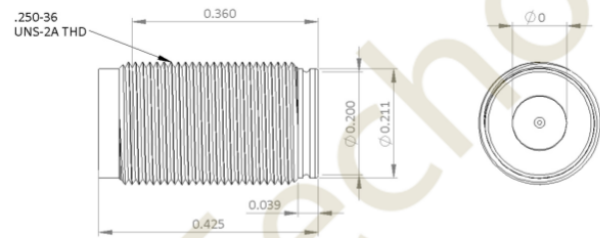

RFecho	SMA Connector	D550-P36-Y02
Pin Size (.036)	Max. Pin Depth (.100)	Ø 0 (.1540)

Isolation & VSWR

