

Product Datasheet

Product ID: D551-P15-Y02



RFecho
A Gateway to RF World

Super SMA Plug (Male) Thread In D551-P15-Y02

This model D551-P15-Y02 is a Connector utilizes the basic PTFE dielectric interface and features low VSWR mode free through 27 GHz and less than -100 dB RF leakage. The thick outer conductor wall provides great durability to assure reliability in repeat mating, enhancing component performance.



Features

low VSWR
free through 27 GHz and less than -100 dB RF leakage.

Available Accesories

50 ohm Seal



Applications

Telecom Communication
Sub-assemblies
Radio equipment and instruments
Wireless Communication
Test Labs
Instrumentations


Electrical Specifications

Frequency	(18-27) GHz
Rear Thd	.250-36
Mounting	Thread-in
Hermetic Seal Available	YES
Accepts Pin Diameter	.015
Gender	Male
Tools, C-bore	T-292-2
Tools, Solder	T-220-1

Isolation & VSWR

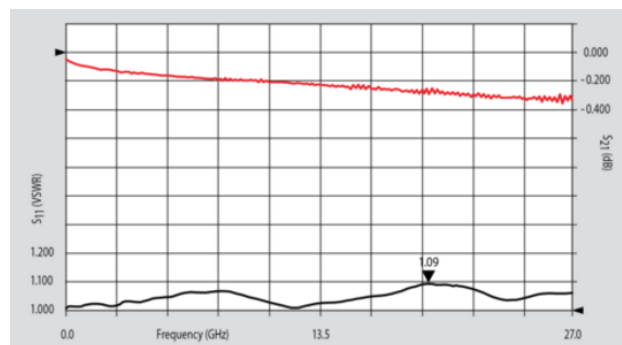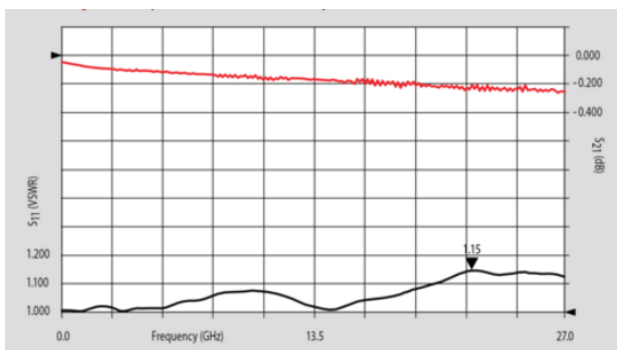

PRODUCT DIMENSIONS

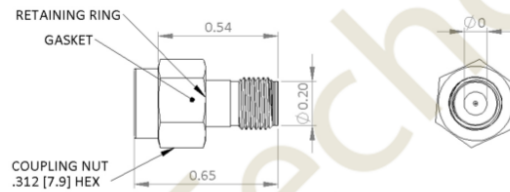

RFecho	SMA Connector	D551-P15-Y02
Pin Size (.015)	Max. Pin Depth (.100)	Ø 0 (.0765)